



SUSTAINABLE CONTAINER SHIP FOR INLAND SHIPPING IN BANGLADESH

K. Shahriar Iqbal, N. M. Golam Zakaria, M. Imran Khaled and M. Milon Khan

Department of Naval Architecture and Marine Engineering,
Bangladesh University of Engineering and Technology, Dhaka, Bangladesh
Iqbal.shahriar@gmail.com

ABSTRACT

A project will be sustainable if it shows attractive economic performance, less detrimental to the environment, and good service quality. This paper was aimed to select a sustainable design of a container ship from four alternative designs for inland shipping in Bangladesh. In this selection process economic performances of these ships were estimated as well as their environmental impacts were assessed. Before making the final selection, their service qualities were also discussed.

Keywords: Economic performance, environmental impact assessment, ship design, global warming

1. INTRODUCTION

A design, which is only commercially attractive, will not sustain for long as it may face newly adopted regulation to protect the global as well as local environment. Such regulations often increase the cost of operation. So it's always wise to take these possibilities into account while planning to launch a new project.

Bangladesh is going to add a new fleet of container ships in its inland waterways to ease the mobility of containers from and to the country's sea ports. To do so inland container ports and the container handling facilities are being developed. New container ships are being owned by some public and private entrepreneurs. In most of the cases commercial attractiveness of the ships are being considered.

This paper focused on a methodology to select a design considering not only the commercial attractiveness but also the environmental burden imposed by the ships. The quality of service is also discussed in this selection process.

Hasegawa and Iqbal [2], Iqbal and Hasegawa [3] and Iqbal and Shill [4] adopted methodology to compare inland water and road transportation systems to find the best option for carrying cargo and passenger. This method included comparison of economical benefit, environmental burden imposed and service quality rendered by the transportation systems. In this paper similar methodology was used to compare alternative design of container ships. Here the environmental impact assessment was carried more in depth using the software SimaPro [5].

2. METHODOLOGY

Considering the total price of the ships and operating costs throughout its 30 years life time, net present values (NPV) [1] of the investments are estimated for a number of alternative design of container ships suitable for inland waterways of Bangladesh and aimed to be operated in Dhaka-Chittagong route. The minimum freight charge required to carry a container (TEU) between Dhaka and Chittagong, that is, required freight rate (RFR) [1], are also estimated and compared to find the commercial attractiveness. In all the cases 12% rate of return (RR) on the investment was taken into account.

Environmental impact assessment (EIA) is the technical qualitative and quantitative characterization and assessment of the consequences of absorption and emission of various materials and substances from and to the environment. The impact analysis addresses ecological and human health consequences and resource depletion and could be divided into three sub-phases:

- Classification: sorting of parameters into environmental effect categories.
- Characterization: calculation of the potential contribution of the environmental loading to each effect category.
- Valuation: assessment of the total environmental impact of the product life cycle.

In this study SimaPro, an EIA database software, was used to assess the consequences on the environment carried by the alternative container ships in their whole life cycle. The effect categories considered here included carcinogens, respiratory organics/inorganics,

climate change, radiation, ozone layer depletion, aquatic acidification/eutrophication, land use, mineral extraction, fossil fuel extraction, etc. These effect categories have impacts on resources, human health, global warming, habitat alteration, biological diversity and other hazards. Assessing the potential contribution of the ships to all these impact types, total damages were assessed and compared to find which one will impose minimum burden to our environment.

Finally discussing the service quality available from the alternative ships, the best alternative was proposed for the inland shipping in Bangladesh.

3. MODEL CONSIDERED

Four model designs of container ships were considered in this analysis. The particulars of the models are shown in Table 1. Table 2 contains the amount of some of the materials and energy used in various phases of the ships' life. The figures shown in the tables were the major input data in this analysis.

4. ECONOMIC PERFORMANCE OF THE MODEL SHIPS

Considering 30 years life time, required freight rate (RFR), that is, minimum freight charge required to

attain 12% rate of return on investment as first cost of ship and operating cost, was estimated for carrying 1 TEU container through a distance of 307 km between Dhaka and Chittagong. Fifteen off-hire days per annum for maintenance was taken into account in this estimation. Net present value (NPV), another parameter for comparison of economic performance, was also estimated here to find economically the most attractive ship model. For this estimation 8000 Tk./TEU, which is the current rate charged by railway, was considered. Both the parameters were calculated according to I. L. Buxton [1]. The Results are shown in Figure 1 and Figure 2.

The ship with hatch-cover showed the best performance, that is, the minimum required freight rate of Tk. 6035/TEU and the highest net present value of Tk. 365,149,000. All with 12 % rate of return on investment. The ship without hatch-cover was the next. The worst among the four was the ship with deck loading and 13.15m breadth. This is because the ship with hatch-cover had the capacity of 108 TEUs and comparatively low construction cost. The construction costs of the deck-loading type ships were comparatively higher due to its heavy deck construction to withstand the containers' weight.

Table 1: Particulars of Container Ships Considered

Ship Type	Capacity (TEUs)	Length (M)	Breadth (M)	Depth (M)	Speed (KN)	Engine Power (KW)	Estimated Price (Tk)*
Deckloading	100	75.4	15.66	4.2	10	1140	303,769,114
Deckloading	80	75.1	13.15	4.2	10	910	287,160,688
With hatchcover	108	75.5	13.15	6.2	10	1130	301,113,375
Without hatchcover	108	75.4	13.15	8.0	10	1130	308,379,139

*1 USD= 69 Tk.

Table 2: Materials and Energy Consumption during Construction, Maintenance and Operation of four selected container ships

Ship Type	Construction and Maintenance Phase				Operation Phase	
	Material			Energy	Diesel (kg)	Lub Oil (kg)
	Hull	Machinery	Outfitting			
	Low alloy Steel (kg)	Ferrochromium High Carbon Steel (kg)	Brass (kg)	Electricity (MJ)		
Deckloading	8.74E5	6.95E4	7.5E3	1.6E6	1.48E7	2.95E5
Deckloading	8.25E5	6.95E4	7.5E3	1.52E6	1.26E7	2.49E5
With hatchcover	8.33E5	6.95E4	7.5E3	1.53E6	1.47E7	2.92E5
Without hatchcover	8.94E5	6.95E4	7.5E3	1.63E6	1.47E7	2.92E5

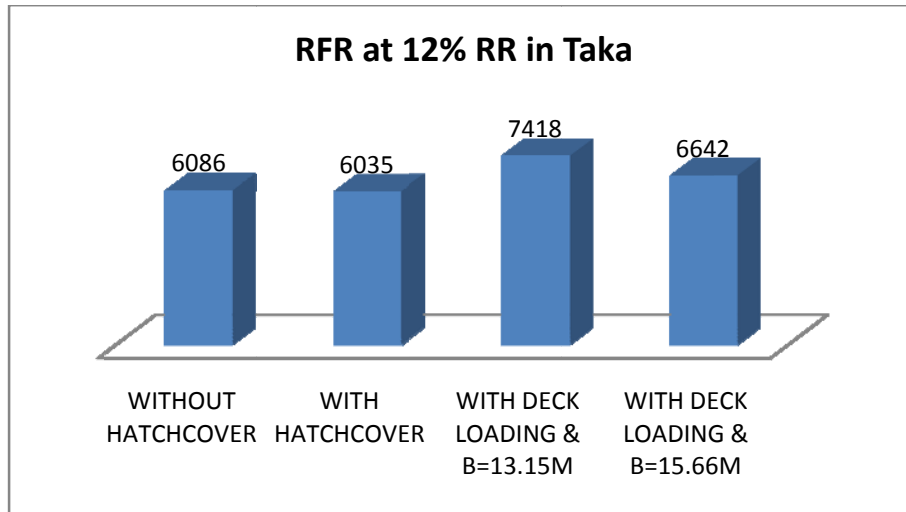


Figure 1. Required freight rate for carrying 1 TEU between Dhaka and Chittagong by alternative container ships

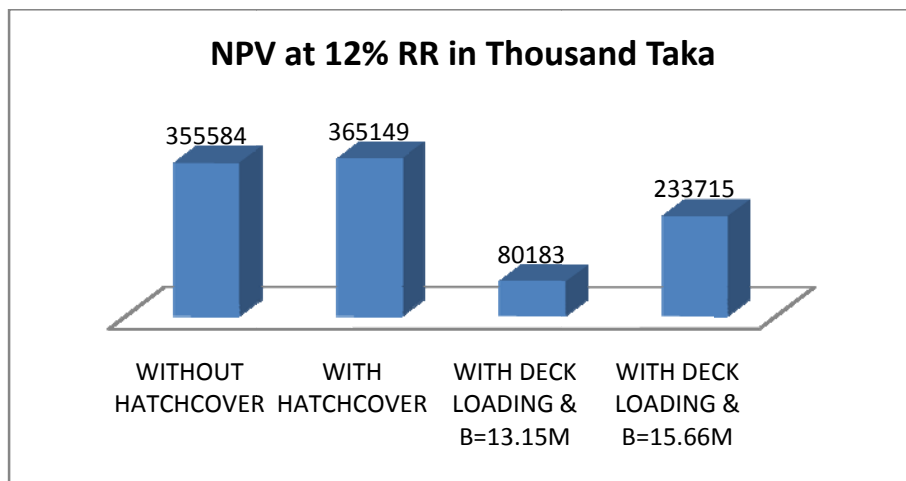


Figure 2. Net present value of the cash flow for carrying containers between Dhaka and Chittagong by alternative container ships

5. ENVIRONMENTAL IMPACT ASSESSMENT

Environmental impact assessment of the models were carried out using the software SimaPro. Amount of some major materials and energy required to construct and operate the model ships were used as input to the system. The percentage of the materials which were considered to be recycled was also used as input. SimaPro developed life cycle model of the ship with the inputs and outputs from and to the environment. The life cycle model of the container ship with deck-loading and 15.66m breadth is shown in Figure 3. Similar models were generated for other

three ship models. Then, using SimaPro, the environmental burden imposed by the ships were assessed. The results were shown in Figure 4 as the damage assessment and Figure 5 as the single score of the consequences of environmental burden. In these results the impacts on human health, ecosystem quality, climate change and the use of resources are shown. The best option from the environmental point of view was the ship with deck-loading and 13.15m breadth and the worst was the ship with deck-loading and 15.66m breadth. The impacts imposed by two other ships are very close in magnitude, with only a very little better result for ship with hatch-cover.

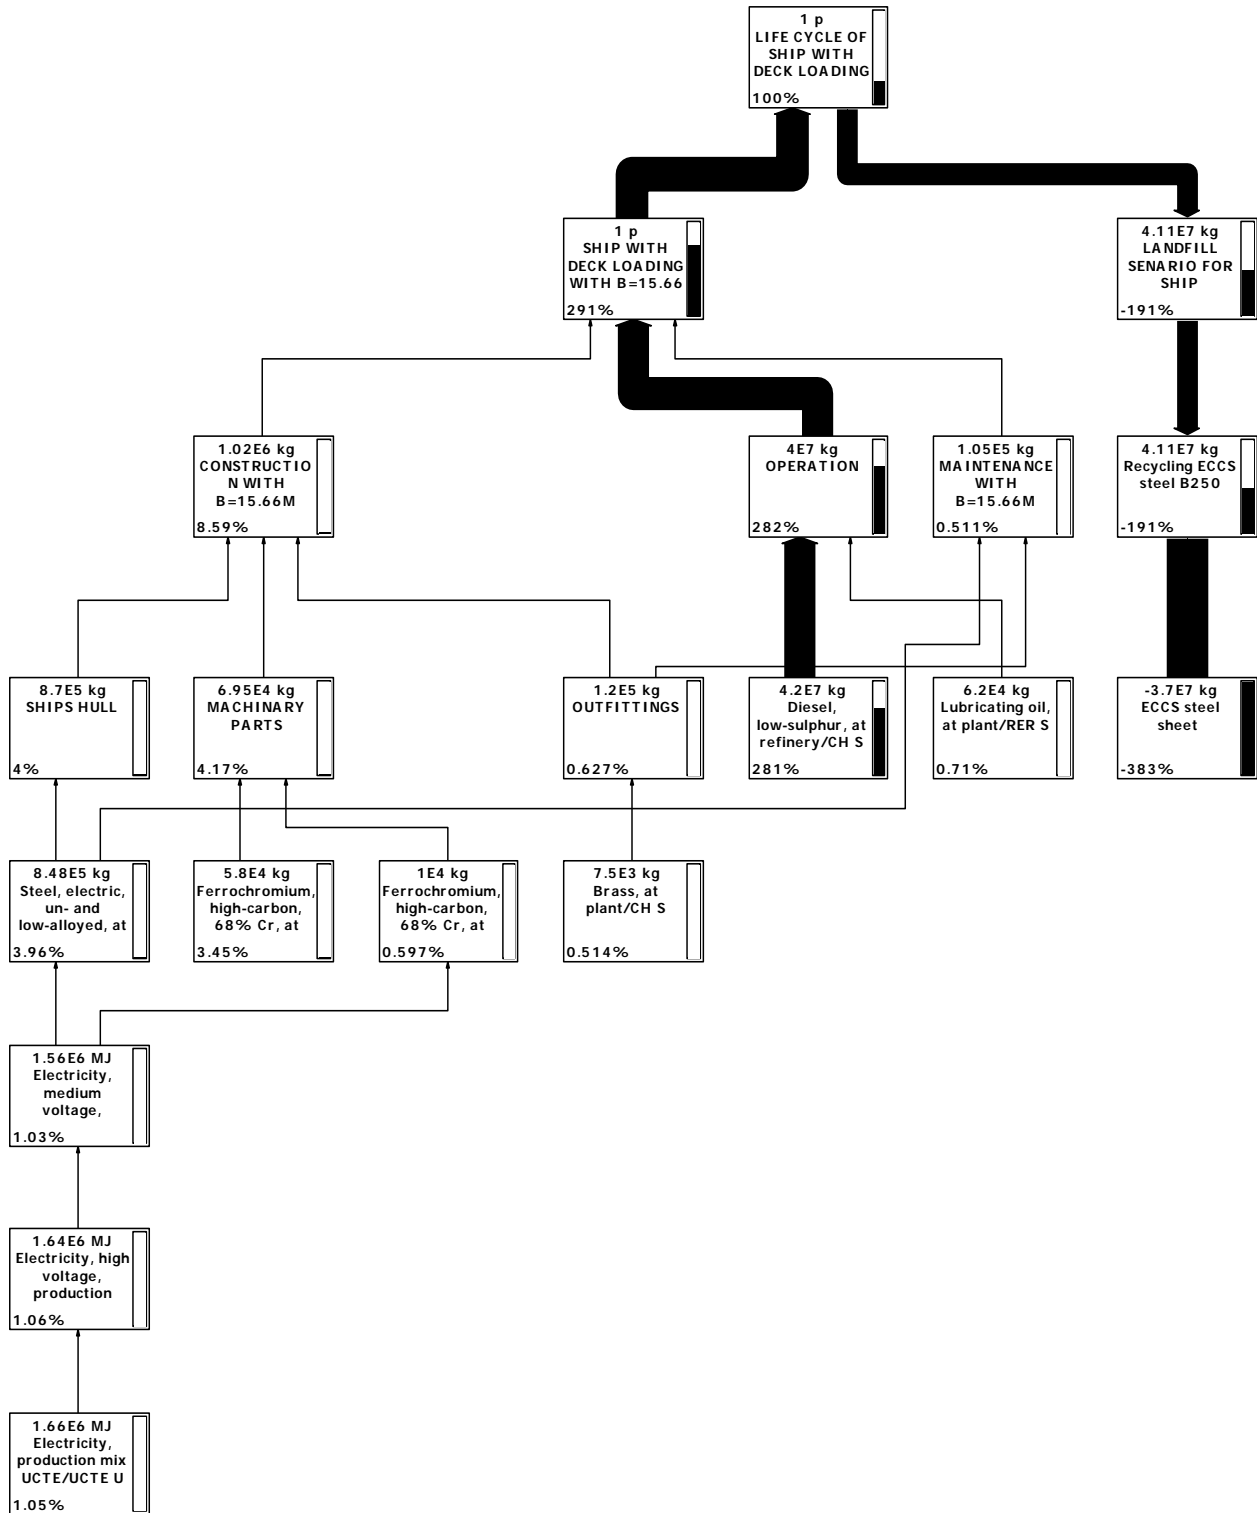


Figure 3. Life cycle of container ship with deck loading and B=15.66M

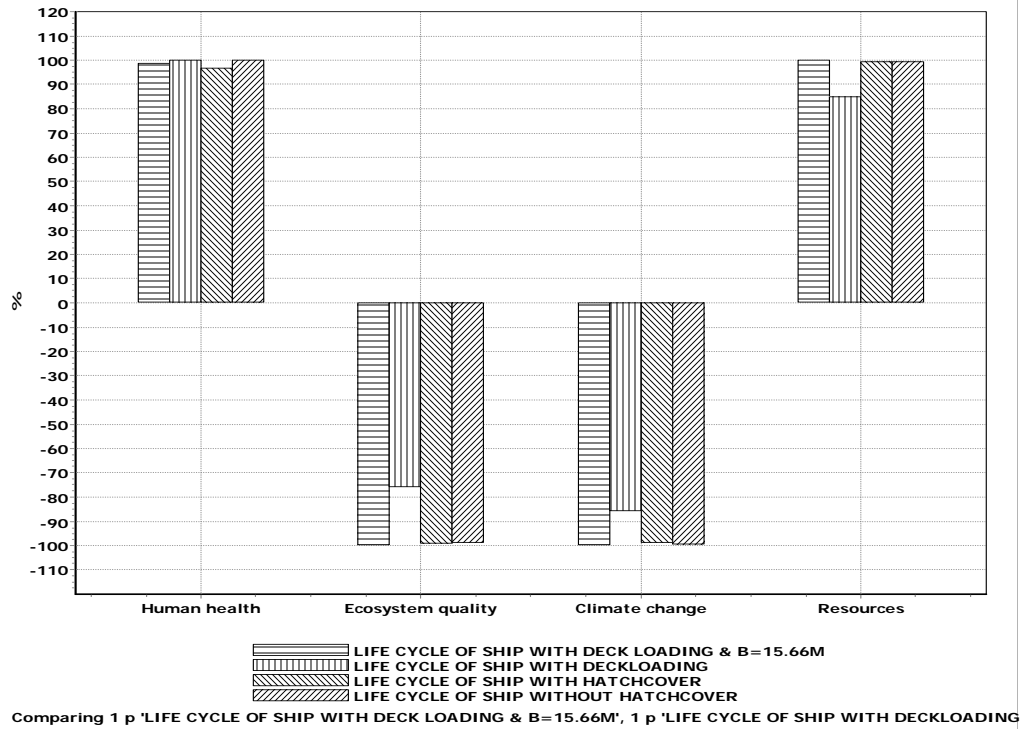


Figure 4. Damage assessment of four model ships' life cycle

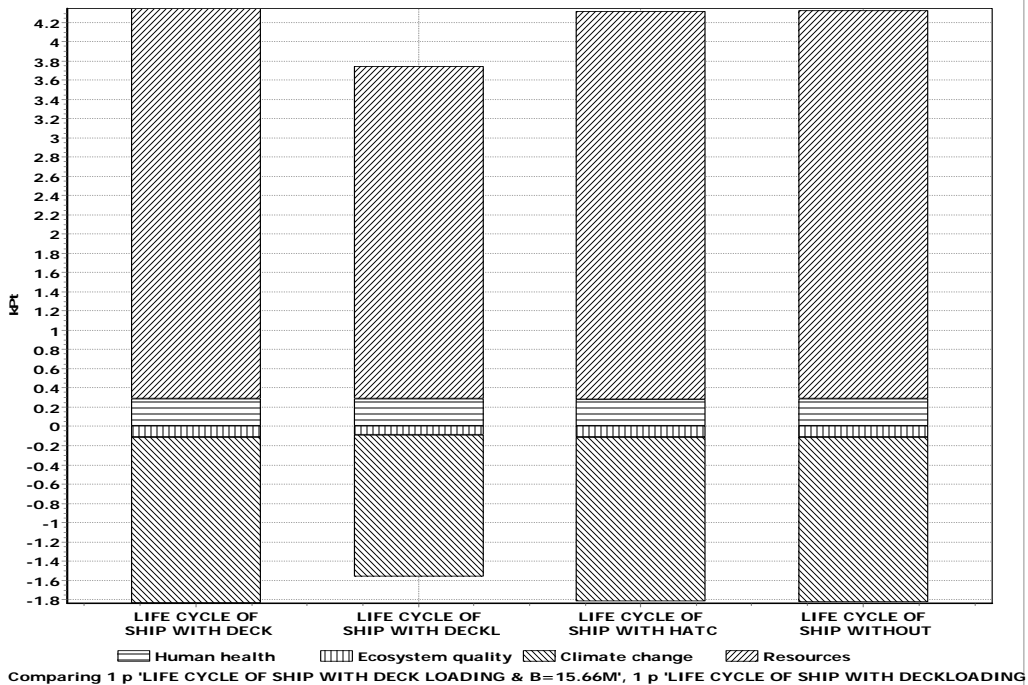


Figure 5. Single score of the consequences of environmental burden of four model ships

6. SERVICE QUALITY

For loading and unloading of the containers, deck-loading type ships will be favourable. On the other hand ship with hatch-cover will protect the containers from adverse weather condition. Among the models considered here the ship with and without hatch-cover have more capacity of carrying containers, which is 108 TEUs.

7. CONCLUSION

Analyzing three different criterion, that is, economic benefit, environmental burden imposed and service quality, the ship with hatch-cover would be the best option among the models of the container ships considered. The following reasons were in support of this option,

- it would require minimum freight rate to attain specific rate of return on investment,
- it would ensure maximum net present value of the total cash flow in its life time,
- though the ship with deck-loading and 13.15m breadth showed minimum damage to the environment, the ship with hatch-cover got more capacity of carrying 108 TEUs containers.
- the loading - unloading facility is in favour of deck-loading type container ship, but the ship with hatch-cover would protect the containers from damage occurred by bad weather.

There are uncertainties in such analysis. One should be aware of these uncertainties while using such model

for comparison of different projects. The reasons behind these uncertainties are usually due to,

- uncertain data,
- uncertainties on the correctness of the model,
- uncertainties caused by incompleteness of the model,
- different opinion on weights of various impact categories, etc.

REFERENCES

1. Buxton, I. L.; Engineering Economics and Ship Design. Book published by British Ship Research Association, UK, 1976.
2. Hasegawa K and Iqbal K S; Inland Transportation System Planning by Life Cycle Impact Assessment: A Case Study. Journal of Marine Science and Technology, Springer-Verlag Tokyo, Vol. 5, pp. 1-8, 2000.
3. Iqbal K S and Hasegawa K; Inland Transportation System Planning by Life Cycle Impact Assessment: A Case Study, (second report: single comparison index). Journal of Marine Science and Technology, Springer-Verlag Tokyo, Vol. 6, pp 83-92, December 2001.
4. Iqbal K S and Shill S K; A Comparative Study of Two Passenger Transportation Systems between Two Bangladeshi Cities. Journal of Naval Architecture and Marine Engineering, pp. 1-10, vol. 2, no. 2, 2005
5. PRe Consultants, SimaPro (Environmental Impact Assessment Database Software), www.pre.nl